

CELLPACK

Power Gel

Seals and protects all electrical installations

Features:

- Unlimited shelf life *when unopened*
- Transparency *for visual testing*
- High protection IP68 *against moisture & humidity*
- Easy handling *and safe processing*

Power Gel is a transparent, two-component gel used to cast branch and connection boxes.

It's simple to cast with easy step-by-step instructions and a two-component gel with a mixing ratio of 1:1. All parts needed are included in the pack. Unmixed, non-required material can be stored for later use.

Unopened Power Gel has an unlimited shelf life.

Once cast, the Power Gel sets within 15 minutes, sealing and protecting electrical and electronic components. It offers protection against wire breakage and loose contacts with its vibration damping characteristics, and protection against moisture with an IP68 rating.

Power Gel is ideal for low voltage electrical systems up to 1kV, indoors or outdoors, and in soils or water in branch and connection boxes with strain relief.

Power Gel is also removable after use and doesn't need hazardous substances labelling.

Power Gel – easy, safe and effective protection.



↑
Removable
if needed

← Simple to measure and pour



Cat No. **335121**
1000ml Cellpack Power Gel

Kit includes:
Power Gel component A
Power Gel component B
Measuring Cup and
Spatula



www.intlcert.com

	VIC	NSW	QLD	SA	WA
Telephone:	(03) 8793 9700	(02) 9734 9944	(07) 3283 1199	(08) 8345 0017	(08) 9271 9787
Facsimile:	(03) 8793 9777	(02) 9734 9933	(07) 3283 1170	(08) 8345 0118	(08) 9271 8981

Web/Email: www.omegapower.com.au / sales@omegapower.com.au

by
OMEGA

Screw Connectors for aluminium and copper conductors

CSV-T Shear Bolt Screw Connector

These Screw Connectors are longitudinally sealed with shear head bolts and separator. Ideal for low voltage applications.

- For RM/SM/RE/SE aluminium and copper conductors. Suitable for straight-through and transition joints.
- For connecting conductors Class 1 and Class 2 in compliance with DIN-EN/IEC 60228.

95-240mm² cable. Aluminium tin-plated material.



Cat No. **266811**
CSV-T Screw Connector

VS Screw Connector

These Screw Connectors are for aluminium and copper conductors with grub screws.

- VS = For heat shrinkable cable joints.

6-50mm² cable. Aluminium material.



Cat No. **126214**
VS Screw Connector


Self Amalgamating Tape

Conductor insulation for plastic insulated cables

CP62 High Voltage Insulation Tape

- Operating Temperature up to 90°C.
- For plastic insulated cables up to 69kV.
- Maximum temporary temperature 130°C
- 19mm x 0.75mm x 4.5m.

Cat No. **10-411**
Self Amalgamating Tape

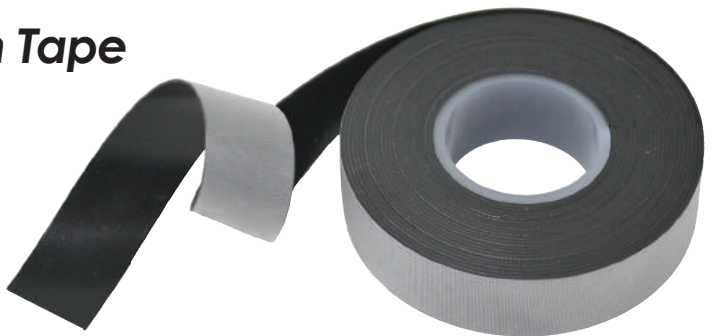

Telephone: (03) 8793 9700
Facsimile: (03) 8793 9777

NSW
(02) 9734 9944
(02) 9734 9933

QLD
(07) 3283 1199
(07) 3283 1170

SA
(08) 8345 0017
(08) 8345 0118

WA
(08) 9271 9787
(08) 9271 8981

by
OMEGA